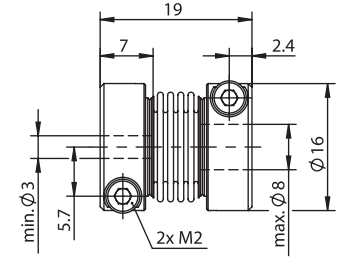
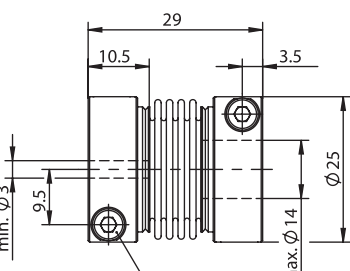
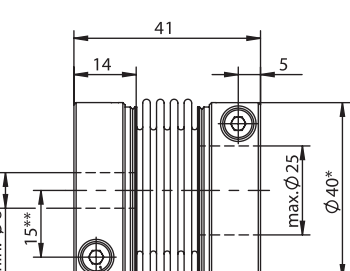


MKE-7			MKE-14
	0.70 [Nm]	Nennmoment Nominal torque	1.40 [Nm]
	340 [Nm/rad]	Torsionssteife Torsional stiffness	690 [Nm/rad]
	75 [N/mm]	Laterale Federsteife Lateral spring stiffness	116 [N/mm]
	17 [N/mm]	Axiale Federsteife Axial spring stiffness	36 [N/mm]
	±0.035 [mm]	Max. lateraler Wellenversatz Max. lateral shaft misalignment	±0.036 [mm]
	±0.20 [mm]	Max. axialer Wellenversatz Max. axial shaft misalignment	±0.17 [mm]
	±1 [Grad] [Degree]	Max. angularer Wellenversatz Max. angular shaft misalignment	±1 [Grad] [Degree]
	0.70 [10 ⁻⁶ kgm ²]	Trägheitsmoment Inertia torque	0.72 [10 ⁻⁶ kgm ²]
	19 [g]	Masse Mass	21 [g]
	1.3 M _A [Nm]	Anzugsmoment der Schrauben Tightening torque of screws	1.3 M _A [Nm]
	17.4 [ø mm]	Störkreis Swing circle	17.4 [ø mm]

MKE-20			MKE-50
	2 [Nm]	Nennmoment Nominal torque	5 [Nm]
	1200 [Nm/rad]	Torsionssteife Torsional stiffness	2460 [Nm/rad]
	99 [N/mm]	Laterale Federsteife Lateral spring stiffness	189 [N/mm]
	13 [N/mm]	Axiale Federsteife Axial spring stiffness	28 [N/mm]
	±0.04 [mm]	Max. lateraler Wellenversatz Max. lateral shaft misalignment	±0.04 [mm]
	±0.30 [mm]	Max. axialer Wellenversatz Max. axial shaft misalignment	±0.28 [mm]
	±1 [Grad] [Degree]	Max. angularer Wellenversatz Max. angular shaft misalignment	±1 [Grad] [Degree]
	4.90 [10 ⁻⁶ kgm ²]	Trägheitsmoment Inertia torque	5.10 [10 ⁻⁶ kgm ²]
	50 [g]	Masse Mass	52 [g]
	2 M _A [Nm]	Anzugsmoment der Schrauben Tightening torque of screws	2 M _A [Nm]
	27.5 [ø mm]	Störkreis Swing circle	27.5 [ø mm]

MKE-100			MKE-150
	9 [Nm]	Nennmoment Nominal torque	15 [Nm]
	4850 [Nm/rad]	Torsionssteife Torsional stiffness	9800 [Nm/rad]
	103 [N/mm]	Laterale Federsteife Lateral spring stiffness	171 [N/mm]
	11 [N/mm]	Axiale Federsteife Axial spring stiffness	24 [N/mm]
	±0.07 [mm]	Max. lateraler Wellenversatz Max. lateral shaft misalignment	±0.07 [mm]
	±0.54 [mm]	Max. axialer Wellenversatz Max. axial shaft misalignment	±0.51 [mm]
	±1 [Grad] [Degree]	Max. angularer Wellenversatz Max. angular shaft misalignment	±1 [Grad] [Degree]
	45.50 [10 ⁻⁶ kgm ²]	Trägheitsmoment Inertia torque	49 [10 ⁻⁶ kgm ²]
	180 [g]	Masse Mass	186 [g]
	4.50 M _A [Nm]	Anzugsmoment der Schrauben Tightening torque of screws	4.50 M _A [Nm]
	41.1 [ø mm]	Störkreis bei Bohrungs-Ø ≤ 20 Swing circle with bore-Ø ≤ 20	41.1 [ø mm]

Bei Bohrungs-Ø > 20 / with bore-Ø > 20
*Ø46 // **17

Bei Bohrungs-Ø > 20 / with bore-Ø > 20
*Ø46 // **17