


Označení	Rozměry [mm]										Hmotnost [kg]
	$\overset{+0,00}{\underset{-0,02}{\varnothing D}}$	$\overset{+0,00}{\underset{-0,02}{\varnothing d}}$	$\varnothing D1$	C	C1	B	M	M1	X	$\overset{+0,02}{\underset{-0,00}{\varnothing}}$ Vrtání pro čep rolny	
HPC 26	26	10	13,1	20,0	0,8	23,0	M10 × 1,0	13	4	10,02	0,09
HPC 30	30	12	15,9	20,0	0,8	25,0	M12 × 1,5	14	4	12,02	0,11
HPC 32	32	12	15,9	22,0	0,8	25,0	M12 × 1,5	14	4	12,02	0,14
HPC 35	35	16	19,1	22,0	0,8	32,5	M16 × 1,5	18	8	16,02	0,17
HPC 40	40	14	18,0	30,0	1,6	40,0	M14 × 2,0	26	8	14,02	0,27
HPC 40-1	40	18	22,0	27,6	1,6	36,5	M18 × 1,5	19	8	18,02	0,24
HPC 47	47	20	25,5	27,6	1,6	40,5	M20 × 1,5	21	8	20,02	0,42
HPC 50	50	16	23,0	40,0	1,6	50,0	M16 × 2,0	35	8	16,02	0,54
HPC 52	52	20	25,5	33,6	1,6	40,5	M20 × 1,5	21	8	20,02	0,54
HPC 62	62	24	32,0	44,0	1,6	58,0	M24 × 3,0	35	8	24,02	1,04
HPC 62-1	62	24	32,0	44,0	1,6	49,5	M24 × 1,5	25	8	24,02	1,04
HPC 72	72	24	32,0	44,0	1,6	49,5	M24 × 1,5	25	8	24,02	1,40
HPC 76	76	30	44,5	52,0	1,6	69,5	M30 × 3,5	40	12	30,02	1,91
HPC 80	80	30	44,5	52,0	1,6	69,5	M30 × 3,5	40	12	30,02	2,07
HPC 85	85	30	44,5	52,0	1,6	69,5	M30 × 3,5	40	12	30,02	2,37
HPC 90	90	30	44,5	52,0	1,6	69,5	M30 × 3,5	40	12	30,02	2,65
HPC 100	100	30	44,5	52,0	1,6	80,0	M30 × 3,5	50	12	30,02	3,33
HPC 100-1	100	30	44,5	52,0	1,6	69,5	M30 × 3,5	40	12	30,02	3,15
HPC 125	125	48	82,5	76,0	1,6	105,0	M48 × 5,0	60	12	48,02	8,48
HPC 150	150	64	82,5	76,0	1,6	140,0	M64 × 6,0	82	12	64,02	12,50
HPC 200	200	64	82,5	76,0	1,6	140,0	M64 × 6,0	82	12	64,02	21,87

Matky a podložky nejsou součástí dodávky.

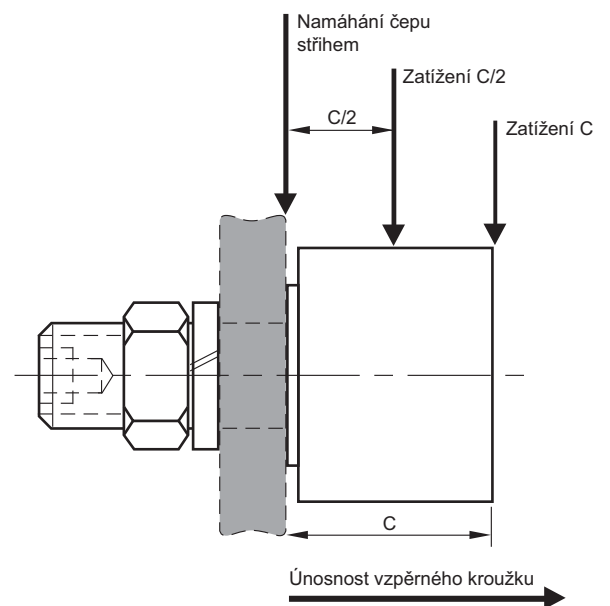

	Únosnost [N]									Únosnost vzpěrného kroužku
	Radiální zatížení rolny			Axiální zatížení rolny			Únosnost čepu			
	3000 hod. L ₁₀ při 100 ot./min	500 hod. L ₁₁₀ při 33 1/3 ot./min	Max. radiální zatížení, statické	3000 hod. L ₁₀ při 100 ot./min	500 hod. L ₁₁₀ při 33 1/3 ot./min	Max. axiální zatížení, statické	V ohybu = 0,75 S _y		Ve stříhu	
							Zatížení C/2	Zatížení C		
1060	2790	1000	650	1720	1350	1990	900	8700	2090	
1060	2790	1000	650	1720	1350	1990	900	8700	2090	
2290	6000	2680	1410	3700	1950	3750	1670	14400	2090	
2290	6000	2680	1410	3700	1950	3750	1670	14400	2090	
4670	12200	4900	2890	7560	2650	6110	3250	25470	2090	
4670	12200	4900	2890	7560	2650	6230	3560	25470	2090	
4670	12200	4900	2890	7560	2650	6230	3560	25470	2090	
6450	17000	7200	4030	10600	3050	8790	5080	45760	4050	
6450	17000	7200	4030	10600	3050	13810	7670	50220	4050	
8800	23100	10100	5400	14200	6850	16000	8750	64850	5960	
8800	23100	10100	5400	14200	6850	16000	8750	64850	5960	
20330	48400	33900	7520	17840	20330	26860	15740	104040		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
26700	63600	89000	10800	25700	53400	44670	25880	160520		
62200	148100	230800	24600	58500	144600	128010	70500	411800		
67000	159000	251000	26500	63000	147000	303430	163550	732100		
67000	159000	251000	26500	63000	147000	303430	163550	732100		

Velikosti ØD26-62 mají kuličkový typ ložiska, ØD72-200 mají kuželíkový typ ložiska.