


Označení	Rozměry [mm]												Hmotnost [kg]
	$\varnothing D^{+0,00}_{-0,02}$	$\varnothing d^{+0,00}_{-0,02}$	$\varnothing D1$	C	C1	B	M	M1	$N^{+0,00}_{-0,25}$	W	X	$\varnothing^{+0,02}_{-0,00}$ Vrtání pro čep rolny	
HPCE 26	26	13	17,1	20,0	0,8	23,0	M10 × 1,0	13,0	10	0,5	13	10,00	0,5
HPCE 30	30	15	17,5	20,0	0,8	25,0	M12 × 1,5	14,0	11	0,5	15	11,00	0,5
HPCE 32	32	15	17,5	22,0	0,8	25,0	M12 × 1,5	14,0	11	0,5	15	11,00	0,5
HPCE 35	35	20	23,8	22,0	0,8	32,5	M16 × 1,5	18,0	14,50	1,0	20	14,50	1,0
HPCE 40-1	40	22	28,5	27,6	1,6	36,5	M18 × 1,5	20,5	16	1,0	22	16,00	1,0
HPCE 47	47	24	32,0	27,6	1,6	40,5	M20 × 1,5	22,5	18	1,0	24	18,00	1,0
HPCE 50	50	24	32,0	40,0	1,6	50,0	M16 × 2,0	32,0	18	1,0	24	18,00	1,0
HPCE 52	52	24	32,0	33,6	1,6	40,5	M20 × 1,5	22,5	18	1,0	24	18,00	1,0
HPCE 62	62	28	43,0	44,0	1,6	58,0	M24 × 3,0	38,0	20	1,5	28	20,00	1,5
HPCE 62-1	62	28	43,0	44,0	1,6	49,5	M24 × 1,5	27,5	22	1,0	28	22,00	1,0
HPCE 72	72	28	38,0	44,0	1,6	49,5	M20 × 1,5	27,5	22	1,0	28	22,00	1,0
HPCE 76-1	76	35	50,0	52,0	1,6	70,0	M24 × 1,5	41,0	29	1,5	35	29,00	1,5
HPCE 80	80	35	50,0	52,0	1,6	70,0	M24 × 1,5	41,0	29	1,5	35	29,00	1,5
HPCE 85	85	35	50,0	52,0	1,6	70,0	M24 × 1,5	41,0	29	1,5	35	29,00	1,5
HPCE 90	90	35	50,0	52,0	1,6	70,0	M24 × 1,5	41,0	29	1,5	35	29,00	1,5
HPCE 100	100	35	50,0	52,0	1,6	70,0	M24 × 1,5	41,0	29	1,5	35	29,00	1,5
HPCE 125	125	64	82,5	76,0	1,6	105,0	M48 × 5,0	55,0	50	1,5	64	50,00	1,5
HPCE 150	150	80	82,5	76,0	1,6	140,0	M64 × 6,0	75,0	65	1,5	80	65,00	1,5

Matky a podložky nejsou součástí dodávky.

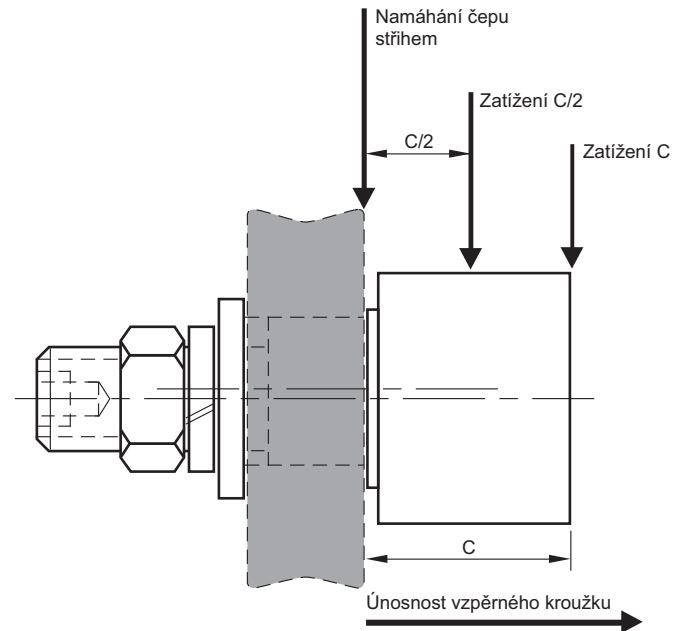

	Únosnost [N]									
	Radiální zatížení rolny			Axiální zatížení rolny			Únosnost čepu			Únosnost vzpěrného kroužku
	3000 hod. L_{10} při 100 ot./min	500 hod. L_{10} při 33 1/3 ot./min	Max. radiální zatížení, statické	3000 hod. L_{10} při 100 ot./min	500 hod. L_{10} při 33 1/3 ot./min	Max. axiální zatížení, statické	V ohybu = 0,75 S_y		Ve střihu	
							Zatížení C/2	Zatížení C		
1060	2790	1000	650	1720	1350	1990	900	8700	2090	
1060	2790	1000	650	1720	1350	1990	900	8700	2090	
2290	6000	2680	1410	3700	1950	3750	1670	14400	2090	
2290	6000	2680	1410	3700	1950	3750	1670	14400	2090	
4670	12200	4900	2890	7560	2650	6230	3250	25470	2090	
4670	12200	4900	2890	7560	2650	6230	3250	25470	2090	
6450	17700	7200	4030	10600	3050	14450	7740	51750	4050	
6450	17700	7200	4030	10600	3050	14450	7740	51750	4050	
8800	23100	10100	5400	14200	6850	16000	8680	64850	5960	
8800	23100	10100	5400	14200	6850	16000	8680	64850	5960	
20330	48400	33950	7520	17840	20330	17990	9870	71950		
26700	63600	89000	10800	25700	53400	27840	14690	101870		
26700	63600	89000	10800	25700	53400	27840	14690	101870		
26700	63600	89000	10800	25700	53400	27840	14690	101870		
26700	63600	89000	10800	25700	53400	27840	14690	101870		
26700	63600	89000	10800	25700	53400	27840	14690	101870		
62200	148100	230800	24600	58500	144600	143070	74830	411800		
67000	159000	251000	26500	63100	147000	330120	173200	720500		

Velikosti $\varnothing D26-62$ mají kuličkový typ ložiska, $\varnothing D72-150$ mají kuželíkový typ ložiska.